


atelier sedap / LIGHTING

191 Design Atelier Sedap

Corniche is a high strength plaster profile for indirect T5 fluorescent or linear LED lighting.

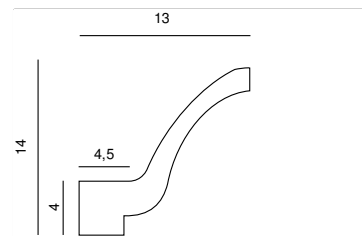

Weight

6.5 Kg

Orientation



FINISHES

Natural plaster finish

AA

LIGHT SOURCES

REFERENCE	DESCRIPTION	LENGTH
191	High strength plaster profile LEDs strips or fluo T5 as an option	2,50 M

CORNICHE / LED EQUIPEMENT

REFERENCE	DESCRIPTION
8129 .LDT	5 ml High Power LED strip, warm white (2700 °K) - 120 LEDs /m, 5cm divisible Consumption 19.2 W per meter - 24V - 2000 lumens per meter
8130-1 .LDT	5 ml High Power LED strip, warm white (3000 °K) - 120 LEDs /m, 5cm divisible Consumption 19.2 W per meter - 24V - 2000 lumens per meter
8099 .LDT	5 ml LED strip, warm white (2700 °K) - 60 LEDs /meter, 10cm divisible Consumption 15 W per meter - 24V - 1080 lumens per meter
8100 .LDT	5 ml LED strip, warm white (3000 °K) - 60 LEDs /meter, 10cm divisible Consumption 15 W per meter - 24V - 1080 lumens per meter
8102 .LDT	5 ml RGB LED strip - 60 LEDs /meter, 10cm divisible Consumption 15 W per meter - 24V
5179	Aluminium heatsink section (20 x 6 mm), length 1 meter
011070025	High frequency presence sensor (more info)

Find here the power supplies, drivers and RGB kits.

CORNICHE / FLUO T5 EQUIPEMENT

REFERENCE	DESCRIPTION
5170	T5 fluorescent equipement, with electronic ballast and aluminium reflector (supplied excluding lamps) P. 24 W 580 mm - Option: dimmable ballast (1-10V)
5171	T5 fluorescent equipement, with electronic ballast and aluminium reflector (supplied excluding lamps) P. 21-39 W Multiwatt 880 mm - Option: dimmable ballast (1-10V or DALI)
5172	T5 fluorescent equipement, with electronic ballast and aluminium reflector (supplied excluding lamps) P. 28-54 W Multiwatt 1180 mm - Option: dimmable ballast (1-10V or DALI)
011070025	High frequency presence sensor (more info)