


# atelier sedap / LIGHTING

## 194 Design Atelier Sedap

---

Corniche is a high strength plaster profile for indirect T5 fluorescent or linear LED lighting.

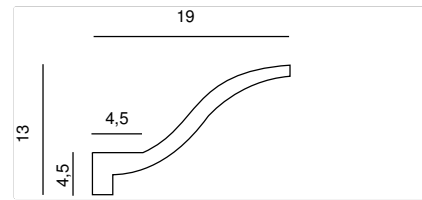

**Weight**

8.3 Kg

**Orientation**



### FINISHES

---

Natural plaster finish

AA

## LIGHT SOURCES

REFERENCE	DESCRIPTION	LENGTH
194	High strength plaster profile LEDs strips or fluo T5 as an option	2,50 M

### CORNICHE / LED EQUIPEMENT

REFERENCE	DESCRIPTION
8129 .LDT	5 ml High Power LED strip, warm white (2700 °K) - 120 LEDs /m, 5cm divisible Consumption 19.2 W per meter - 24V - 2000 lumens per meter
8130-1 .LDT	5 ml High Power LED strip, warm white (3000 °K) - 120 LEDs /m, 5cm divisible Consumption 19.2 W per meter - 24V - 2000 lumens per meter
8099 .LDT	5 ml LED strip, warm white (2700 °K) - 60 LEDs /meter, 10cm divisible Consumption 15 W per meter - 24V - 1080 lumens per meter
8100 .LDT	5 ml LED strip, warm white (3000 °K) - 60 LEDs /meter, 10cm divisible Consumption 15 W per meter - 24V - 1080 lumens per meter
8102 .LDT	5 ml RGB LED strip - 60 LEDs /meter, 10cm divisible Consumption 15 W per meter - 24V
5179	Aluminium heatsink section (20 x 6 mm), length 1 meter
011070025	High frequency presence sensor (more info)

Find here the power supplies, drivers and RGB kits.

### CORNICHE / FLUO T5 EQUIPEMENT

REFERENCE	DESCRIPTION
5170	T5 fluorescent equipement, with electronic ballast and aluminium reflector (supplied excluding lamps) P. 24 W 580 mm - Option: dimmable ballast (1-10V)
5171	T5 fluorescent equipement, with electronic ballast and aluminium reflector (supplied excluding lamps) P. 21-39 W Multiwatt 880 mm - Option: dimmable ballast (1-10V or DALI)
5172	T5 fluorescent equipement, with electronic ballast and aluminium reflector (supplied excluding lamps) P. 28-54 W Multiwatt 1180 mm - Option: dimmable ballast (1-10V or DALI)
011070025	High frequency presence sensor (more info)